

Cat[®] Utility Grease

For low-load, low-speed applications

NLGI Grade 2



Discover the Difference

Reduced Component Wear—Resists softening and protects parts from wear.


Corrosion Protection—Resists oxidation and protects metal against rust. Will not corrode or damage steel, copper bearing alloys or conventional seal materials.

Excellent General Purpose—Lithium Complex grease for low-load, low-speed applications where moisture conditions are low.



Cat® Utility Grease

Grease Selection Guide

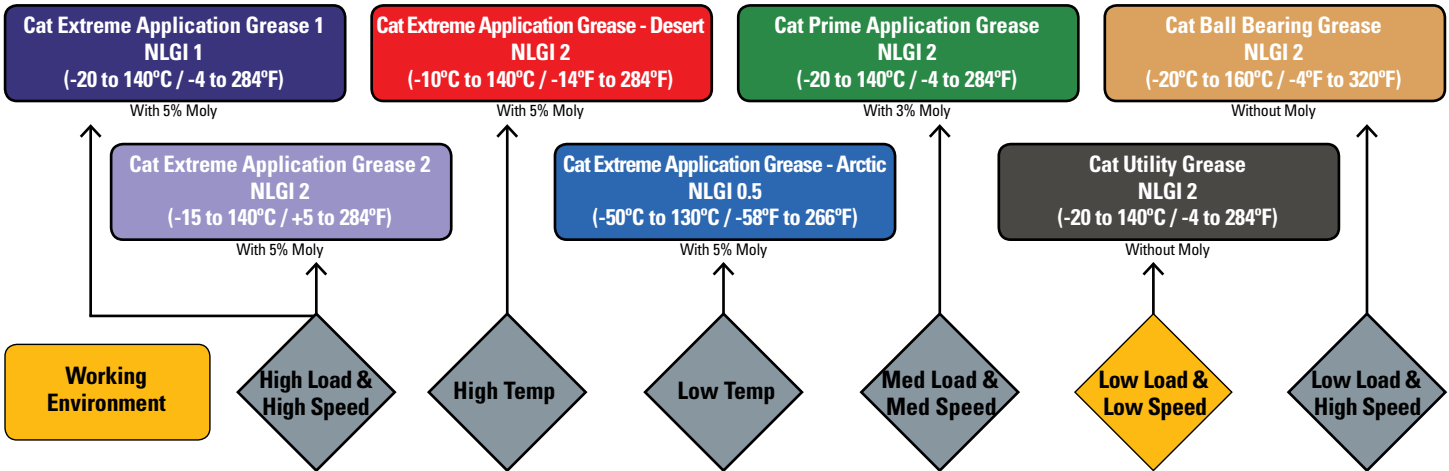

* All temperatures are Operating Temperatures

Typical Properties	
NLGI	2
Color	Blue
Operating Temperature Range, °C	-20 to +140
Operating Temperature Range, °F	-4 to +284
Base Oil Type	Mineral
ASTM D445 Base Oil Viscosity 40°C, mm ² /s	220
Thickener Type	Lithium Complex
ASTM D2265 Dropping point, °C	260
ASTM D2266 4 Ball wear, scar diameter, mm	0.53
ASTM D2596 4 Ball weld load, kg	250
ASTM D1743 Rust prevention	Pass
ASTM D4048 Copper corrosion	1B

The values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

Recommended Use

Cat Utility Grease is recommended for grease fittings and lubrication points in low-load, low-speed applications, at operating temperatures ranging from -20°C to +140 °C (-4°F to +284 °F).

Health and Safety

For information on proper use for health, safety and environment, please refer to the Material Safety Data Sheet (MSDS). Read and understand the MSDS before using this product. Always observe good hygiene measures. For a copy of the MSDS, contact us or visit the web at www.catmsds.com.

CAT DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT.

We offer you the right parts and service solutions, when and where you need them.

The Cat Dealer network of highly trained experts keeps your fleet up and running to maximize your equipment investment.

BUILT FOR IT.™



PEHJ0408
www.cat.com

© 2014 Caterpillar • All Rights Reserved • Printed in USA
CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

